

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



re application of:

Espen HAUGE et al.

Appl. No.: 10/786,591

Filed: February 26, 2004

For: A DEVICE AND A METHOD FOR
REMOVING SOLIDS

Art Unit: Not yet assigned

Examiner: Not yet assigned

Atty. Docket No.: 43315-201295

Customer No.

26694

PATENT TRADEMARK OFFICE

Submission of Certified Copy of Priority Document

Commissioner for Patents
P.O. Box 1450
Alexandria, VA. 22313-1450

Sir:

Submitted herewith is a certified copy of Application No. 20030934 filed on February 27, 2003 in Norway, the priority of which is claimed in the present application under the provisions of 35 U.S.C. 119.

Date: 4-1-04

Respectfully submitted,

A handwritten signature in cursive script, appearing to read "Eric J. Franklin".

Eric J. Franklin
Registration No. 37,134
VENABLE LLP
P.O. Box 34385
Washington, D.C. 20043-9998
Telephone: (202) 344-4000
Telefax: (202) 344-8300



KONGERIKET NORGE
The Kingdom of Norway

Bekreftelse på patentsøknad nr
Certification of patent application no



20030934

▷ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2003.02.27

▷ It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2003.02.27

2004.02.10

Line Reum

Line Reum
Saksbehandler



PATENTSTYRET®
Styret for det industrielle rettsvern

Søknad om patent

PATENTSTYRET

03-02-27*20030934

Skal utfylles av Patentstyret

Behandlende medlem UB

Int. Cl. B01D

Alm. tlg. 30 AUG 2004

kers/fullmektigens referanse og hys ønsket): NO/lh/107498	"Anordning og fremgangsmåte for å fjerne faststoff"		
oppfinnelsens nevneelse:	Den internasjonale søknads nummer Den internasjonale søknads inngivelsesdag		
is søknaden er internasjonal søknad m videreføres etter tentlovens § 31:	ABB Offshore Systems AS Postboks 81 1375 Billingstad <input type="checkbox"/> Søker er en enkeltperson eller en småbedrift, eller flere slike i fellesskap med fast ansatte som til- sammen utfører 20 årsverk eller mindre (på søknadstidspunktet). Det er søkers ansvar å krysse av her for å oppnå laveste satser for søknadsavgift. NB! se også utfyllende forklaring på neste side.		
ker: vn, bopel og adresse. is patent søkes av flere: lysning om hvem som skal være nyndiget til å motta meddelelser patentstyret på vegne av søkerne). rtsett om nødvendig på neste e)	Espen Hauge Mandallsgt. 6 0190 Oslo		
oppfinner: vn og (privat-) adresse rtsett om nødvendig på neste side)	Bryn Aarflot AS Saksbehandler: Svein Arne Olsen		
is søknad tidligere inngitt i eller nfor riket: rtsett om nødvendig på neste e)	Prioritet kreves fra dato	sted	nr.
	Prioritet kreves fra dato	sted	nr.
	Prioritet kreves fra dato	sted	nr.
is avdelt søknad:	Den opprinnelige søknads nr.:	og deres inngivelsesdag	
is utskilt søknad:	Den opprinnelige søknads nr.:	begjært inngivelsesdag	
onert kultur av kroorganisme:	<input type="checkbox"/> Søknaden omfatter kultur av mikroorganisme. Oppgi også deponeringssted og nr.		
levering av prøve av turen:	<input type="checkbox"/> Prøve av den deponerte kultur av mikroorganisme skal bare utleveres til en særlig sakkyndig, jfr. patentlovens § 22 åttende ledd og patentforskriftens § 38 første ledd		
givelse av tegnings- ur som ønskes olisert sammen med nmendraget	Fig. nr. 2		

BEST AVAILABLE COPY

A DEVICE AND A METHOD FOR REMOVING SOLIDS

FIELD OF THE INVENTION AND PRIOR ART

5 The present invention relates to a device according to the preamble of claim 1 for removing solids from a fluid containment space, a separator comprising such a device and a method according to the preamble of claim 9 for removing solids from a fluid containment space.

10

The present invention is particularly applicable for solids removal from separator vessels utilized in the production of crude oil, especially in processes where crude oil must be separated from produced water and wherein a liquid mixture of oil and
15 water entering the vessel contains solids in the form of sand and other sediments.

The invention may be particularly useful for subsea oil industry applications, where out of specification operation may not normally be compensated by downstream process steps, and intervention with a shovel or the like is not an option.
20

However, the invention may also be applicable in many other types of processes in which solids are present in fluid streams,
25 such as waste water treatment and fermentation processes.

Most crude oils (and/or produced water) contain sand and other types of solids. A part of these solids will accumulate at the bottom of separator vessels, storage tanks and other fluid containment spaces. Accumulation of solids in such vessels and
30 tanks may require shutdown of the equipment in order to clean out the accumulated solids. Devices for removing accumulated solids from fluid containment spaces are previously known.

These devices typically comprise a hood, e.g. in the form of an inverted pan or tray, located at the bottom surface of the fluid containment space. Inlet openings are provided in the sides of the hood so as to allow fluid communication into the inner
5 space of the hood from along the bottom surface of the fluid containment space. Drain means are provided for removing fluidised solids from the inner space of the hood and flushing means are provided for directing flushing fluid towards the inlet openings of the hood. The flushing means are arranged to jet
10 flushing fluid along the bottom surface of the fluid containment space to fluidize accumulated solids. The fluidized solids are then withdrawn from the inner space of the hood by the above-mentioned drain means. One such device is e.g. disclosed in the patent document US 5,176,838 A.

15 A problem associated with this known type of device is schematically illustrated in Fig. 1. The flushing means 1 will, as indicated above, cause a fluid flow along the bottom surface 2 of the fluid containment space 3. A part of this fluid flow will pass
20 through the inlet openings 4 of the hood 5 and enter the inner space 6 of the hood as desired. However another part of the fluid flow will hit the outer surface 7 of the hood and will thereby be directed upwards in the fluid containment space 3. This will affect the fluids accommodated in the upper part of
25 the fluid containment space and e.g. disrupt a separation process taking place in the fluid containment space. Thus, the normal operation of the appliance equipped with the device usually starts producing out of specification products or even has to be interrupted during the effectuation of a flushing sequence by
30 the flushing means. This will cause delays to the processing in question, which in its turn will result in lost or delayed production or increased processing costs. Furthermore, there is a risk that the time intervals between the flushing sequences will be

so long that large quantities of solids that might plug the device in question will be accumulated in the fluid containment space.

SUMMARY OF THE INVENTION

5

The object of the present invention is to provide a device and a method for removing solids from a fluid containment space, by means of which it will be possible to eliminate or at least reduce the above-mentioned problem.

10

According to the invention, this object is achieved by a device having the features of claim 1. According to the invention, at least one inlet opening and at least one outlet opening is provided on the same side of the hood, the outlet opening or openings being provided on a level above the inlet opening or openings, and the hood being provided with means for directing fluids through the outlet opening or openings on said first side of the hood from the inner space of the hood to the fluid containment space exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface of the fluid containment space. Since a part of the fluids entering the inner space of the hood will be recirculated to the fluid containment space exterior of the hood, a larger inflow into the inner space of the hood is allowed as compared to a correspondingly dimensioned device having a corresponding drain capacity but no outlet openings in the hood. This implies that the hood of the inventive device can be designed with larger inlet openings as compared to such a correspondingly dimensioned device. The larger the inlet openings, the smaller quantity of fluids will in connection with a flushing sequence hit the outer surface of the hood and be directed upwards in the fluid containment space. The outflow from the inner space of the hood is essentially horizontally directed or directed towards the bottom surface of the

15

20

25

30

fluid containment space, and this outflow will therefore not affect the fluids accommodated in the upper part of the fluid containment space to any appreciable extent. The outflow through the outlet opening or openings in the hood will however affect
5 any vertically directed fluid flow caused by fluids hitting the outer surface of the hood in connection with a flushing sequence so as to deflect this vertically directed fluid flow. Consequently, this outflow will contribute in preventing the fluid flows generated in connection with a flushing sequence from
10 negatively affecting the fluids accommodated in the upper part of the fluid containment space. The solids to be removed are also kept close to the bottom of the fluid containment space, and not spread out to a larger part or the entire volume of said space. With the device according to the invention there will be
15 given possibilities to perform a flushing sequence without having to interrupt the normal operation of the appliance equipped with the device, since the fluid circulation caused by the flushing means can be concentrated to the lower part of the fluid containment space.

20 According to a preferred embodiment of the invention, the directing means is arranged to direct fluids through the respective outlet opening on said first side of the hood from the inner space of the hood to the fluid containment space exterior of the
25 hood in a direction essentially opposite the flushing direction of the flushing means arranged on the first side of the hood. This will create improved possibilities for a circulation of fluids between the fluid containment space exterior of the hood and the inner space of the hood concentrated to the lower part of the
30 fluid containment space in connection with a flushing sequence. This fluid circulation will, at least essentially, keep the fluid flows caused by the flushing means concentrated to the vicinity of the hood in the lower part of the fluid containment

space. Thus, the present invention accomplishes an efficient solids removal without creating upset conditions of the separation process in the fluid containment space.

- 5 According to a further preferred embodiment of the invention, at least one inlet opening is provided on a second side of the hood opposite the first side thereof for allowing fluid communication from the fluid containment space exterior of the hood to the inner space of the hood, flushing means being provided for
10 directing flushing fluid via the fluid containment space exterior of the hood towards said at least one inlet opening on the second side of the hood and at least one outlet opening being provided on said second side of the hood on a level above the respective inlet opening for allowing fluid communication from
15 the inner space of the hood to the fluid containment space exterior of the hood, the hood being provided with means for directing fluids through the respective outlet opening on said second side of the hood from the inner space of the hood to the fluid containment space exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface of
20 the fluid containment space. By this symmetrical structure of the device, a larger area of the bottom surface can be reached by the flushing fluids.
- 25 Further advantages as well as advantageous features of the inventive device will appear from the following description and the dependent claims.

30 The invention also relates to a separator according to claim 8 comprising a separator vessel provided with an inventive device at the bottom surface.

The invention also relates to a method according to claim 9 for removing solids from a fluid containment space.

BRIEF DESCRIPTION OF THE DRAWINGS

With reference to the appended drawings, a specific description
5 of preferred embodiments of the invention cited as examples follows below.

In the drawings:

- 10 Fig. 1 is a schematical cross-sectional view illustrating a device of previously known design for removing solids from a fluid containment space,
- 15 Fig. 2 is a schematical cross-sectional view of a device according to the invention for removing solids from a fluid containment space,
- Fig. 3 is a schematical perspective view of a part of the device according to Fig. 2, and
- 20 Fig. 4 is a schematical view from above of the part illustrated in Fig. 3.

25 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

A device 10 according to the present invention is illustrated in Figs. 2-4. This device comprises a hood 11 arranged or intended to be arranged at a bottom surface 12 of a fluid containment
30 space 13, e.g. in a separator vessel or a tank 40 in which crude oil are to be separated from produced water, and wherein a liquid mixture of oil and water entering the vessel contains solids. One or several inlet openings 14a are provided on a first side

- 15a of the hood for allowing fluid communication from the fluid containment space 13 exterior of the hood 11 to an inner space 16 of the hood. In the illustrated embodiment, the hood 11 is symmetrically designed. Consequently, one or several inlet openings 14b are also provided on a second side 15b of the hood opposite the first side 15a thereof for allowing fluid communication from the fluid containment space exterior of the hood to the inner space of the hood.
- 10 The device further comprises drain means for removing fluidised solids from the inner space 16 of the hood and flushing means for directing flushing fluid via the fluid containment space exterior of the hood 11 towards the respective inlet opening 14a, 14b.
- 15 The drain means comprise a drain opening 17 which opens into the inner space 16 of the hood. The drain opening 17 is preferably centrally located underneath the hood 11 in the bottom surface 12 of the fluid containment space and is connected to a drain piping 18. Through this drain opening 17 and drain piping 18, fluidised solids are withdrawn from the fluid containment space 13 via the inner space 16 of the hood due to the effect of a pressure drop established in a suitable manner.
- 20 The flushing means comprise jet nozzles 19a, 19b arranged on the respective side 15a, 15b of the hood for directing flushing fluid towards the inlet openings 14a, 14b of the hood. The nozzles 19a, 19b are arranged to jet flushing fluid along the bottom surface 12 of the fluid containment space to fluidize solids accumulated on the bottom surface 12 and direct the fluidized solids into the inner space 16 of the hood through the respective inlet opening 14a, 14b. Thus, the solids having entered the inner space 16 are fluidised and remain fluidised by the action
- 25
- 30

of the jet flushing. The nozzles are connected to a supply of flushing fluid via a supply line 30.

One or several outlet openings 20a, 20b are provided on the respective side 15a, 15b of the hood on a level above the respective inlet opening 14a, 14b for allowing fluid communication from the inner space 16 of the hood to the fluid containment space 13 exterior of the hood. The hood 11 is provided with means 21 for directing fluids through the respective outlet opening 20a, 20b from the inner space 16 of the hood to the fluid containment space 13 exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface 12 of the fluid containment space. In the illustrated embodiment, the directing means is constituted by a lower surface 21 of a top part 22 of the hood. The directing means 21 is preferably arranged to direct the outflow from the respective outlet opening 20a, 20b in a direction essentially opposite the flushing direction of the nozzles 19a, 19b arranged on the corresponding side 15a, 15b of the hood. It may be advantageous to direct the outflow from the openings 20a, 20b towards the vessel wall in front of the jet nozzles.

As illustrated by the arrows in Fig. 2, a circulation of fluids between the fluid containment space 13 exterior of the hood and the inner space 16 of the hood will be established via the inlet openings 14a, 14b and the outlet openings 20a, 20b on the respective side 15a, 15b of the hood in connection with a flushing sequence, i.e. when flushing fluid is jetted from the nozzles 19a, 19b. The device 10 is so designed that it will be possible to concentrate this fluid circulation to the lower part of the fluid containment space 13.

The illustrated hood 11 is an elongated structure having an inverted V-shape as seen in cross-section. The legs of the inverted

V-shape are formed by two opposite side walls 23a, 23b, which are inclined towards each other as seen in the direction upwards. The apex of the inverted V-shape is formed by the top part 22 of the hood. The outlet openings 20a, 20b are here provided between the respective side wall 23a, 23b and the top part 22 and the inlet openings 14a, 14b between the respective side wall 23a, 23b and the bottom surface 12 of the fluid containment space. The shape and inclination of the side walls 23a, 23b as well as the top part 22 of the hood are made in order to avoid the accumulation of solids on top of their outer surfaces. The top part may preferably for this purpose have a triangular shape, such as a triangular lid. The hood 11 as a whole may also have any other suitable shape to minimise the potential for solids to settle on top of it, which will be apparent for a person with ordinary skill in the art.

In the embodiment illustrated in Figs. 3 and 4, the longitudinal side walls 23a, 23b of the hood are supported on the bottom surface 12 by bar-shaped supporting members 24a, 24b projecting from the lower edge of the respective side wall 23a, 23b. The hood 11 is here provided with several inlet openings 14a, 14b on its longitudinal sides 15a, 15b. The inlet openings 14a, 14b are arranged in a row along the respective side 15a, 15b mutually separated by the supporting members 24a, 24b. The supporting members 24a, 24b and the respective side wall 23a, 23b may be formed all in one piece or constitute separate elements.

The top part 22 of the hood 11 is connected to the longitudinal side walls 23a, 23b by bar-shaped connecting members 25a (only shown for side 15a in Fig. 3) projecting from the upper edge of the respective side wall 23a, 23b. The hood 11 is here provided with several outlet openings 20a, 20b on its longitudi-

nal sides 15a, 15b. The outlet openings 20a, 20b are arranged in a row along the respective side 15a, 15b mutually separated by the connecting members 25a. The connecting members 25a and the respective side wall 23a, 23b may be formed all in one piece
 5 or constitute separate elements.

In the embodiment illustrated in Figs. 2- 4, the top part 22 of the hood and its lower surface 21 extend in a horizontal direction beyond the outlet openings 20a, 20b. Furthermore, the re-
 10 spective short side 15c of the hood is provided with an inlet opening between the side wall 26 of the short side and the bottom surface 12, but no outlet opening is provided on the shortsides. If so desired, the respective short side 15c could be designed without any opening, in which case the side wall 26
 15 would cover the entire area of the short side.

In the embodiment illustrated in Figs. 3 and 4, one nozzle 19a, 19b is arranged in front of each inlet opening 14a, 14b. The re-
 20 spective nozzle 19a, 19b points towards the associated inlet opening 14a, 14b so as to be able to direct flushing fluid towards the inlet opening 14a, 14b in connection with a flushing sequence. The nozzles 19a, 19b on the respective side 15a, 15b of the hood are here arranged in a row and connected to each other by a pipe 30a, 30b arranged to supply flushing fluid to
 25 the nozzles. If so desired, two or more rows of nozzles 19a, 19b may be provided behind each other on the respective side 15a, 15b. Nozzles belonging to two such rows are illustrated in Fig. 2 on the respective side 15a, 15b of the hood.

30 When solids are to be removed from the bottom surface 12 of the fluid containment space, the drain means are activated so as to allow a withdrawal of fluids through the drain opening 17, e.g. by opening a valve arranged in the drain piping 18, and a

flushing sequence is initiated. During the flushing sequence, the nozzles 19a, 19b jet flushing fluid along the bottom surface 12 towards the inlet openings 14a, 14b. The flushing fluid will fluidize solids settled on the bottom surface and force the fluid-
5 ized solids together with flushing fluid and other nearby fluids from the fluid containment space 13 exterior of the hood 11 into the inner space 16 of the hood via the inlet openings 14a, 14b on the respective side 15a, 15b of the hood. A part of the fluids entering the inner space 16 of the hood is together with fluid-
10 ised solids withdrawn by the drain means via the drain opening 17, and another part of said fluids is made to flow from the inner space 16 of the hood back to the fluid containment space 13 exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface 12 of the fluid con-
15 tainment space through the outlet openings 20a, 20b.

During a first mild flushing mode the nozzles 19a, 19b are made to jet flushing fluid at such a rate than the circulation of fluids between the fluid containment space 13 exterior of the
20 hood and the inner space 16 of the hood via the inlet openings 14a, 14b and the outlet openings 20a, 20b will essentially only affect the fluids in the lower part of the fluid containment space and leave the fluids in the upper part of the fluid containment space essentially unaffected by the circulation. This mild flush-
25 ing may be performed continuously or intermittently with suitable intervals without having to shut down the appliance associated with the fluid containment space.

During a second heavy flushing mode the nozzles 19a, 19b are
30 made to jet flushing fluid at a higher rate than during the mild flushing mode. The heavy flushing mode is intended to be used when a more powerful flushing is required for removing the solids, e.g. when larger amounts of solids or more compact solids

have been settled on the bottom surface of the fluid containment space. In the heavy flushing mode, the appliance associated with the fluid containment space is intended to be shut down. The heavy flushing mode is only expected to be used after a period of unavailability of the continuous or intermittent flushing, caused by operational problems or erroneous operation.

The device 10 according to the invention is suitable for use in a separator vessel, such as a gravity separator, for removing solids settled on the bottom of the vessel. In Fig. 2, the device 10 is illustrated located on the bottom surface 12 of a separator vessel 40 having a cylindrical cross-section (only the lower part of the separator vessel 40 is shown in Fig. 2). The device according to the invention is of course not limited to this use. On the contrary, it may be used in any type of fluid containment space where solids are accumulated on a bottom surface. The inventive device may also be located in a vessel having another geometrical cross-section or shape, such as a squared cross-section depending on the specific industrial application.

The invention is of course not in any way restricted to the preferred embodiments described above. On the contrary, many possibilities to modifications thereof will be apparent to a person with ordinary skill in the art without departing from the basic idea of the invention such as defined in the appended claims.

The inventive device does not for example necessarily have to be symmetrically designed, such as in the exemplary embodiment shown in the figures. The hood including the side walls and the top part may for instance have other designs than shown in Figs. 2-4.



CLAIMS

1. A device for removing solids from a fluid containment space, said device comprising a hood (11) arranged or intended to be arranged at a bottom surface of the fluid containment space, at least one inlet opening (14a) being provided on a first side (15a) of the hood for allowing fluid communication from the fluid containment space exterior of the hood (11) to an inner space (16) of the hood, the device further comprising drain means (17, 18) for withdrawing fluids and fluidized solids from the inner space (16) of the hood and flushing means (19a) for directing flushing fluid via the fluid containment space exterior of the hood towards said at least one inlet opening (14a), **characterized in** that at least one outlet opening (20a) is provided on said first side of the hood (15a) on a level above the respective inlet opening (14a) for allowing fluid communication from the inner space (16) of the hood to the fluid containment space exterior of the hood, and that the hood (11) is provided with means (21) for directing fluids through the respective outlet opening (20a) on said first side (15a) of the hood from the inner space (16) of the hood to the fluid containment space exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface of the fluid containment space.
2. A device according to claim 1, **characterized in** that said directing means (21) is arranged to direct fluids through the respective outlet opening (20a) on said first side (14a) of the hood from the inner space (16) of the hood to the fluid containment space exterior of the hood in a direction essentially opposite the flushing direction of the flushing means (19a) arranged on the first side (15a) of the hood.

3. A device according to claim 1 or 2, **characterized in** that at least one inlet opening (14b) is provided on a second side (15b) of the hood opposite the first side (15a) thereof for allowing fluid communication from the fluid containment space exterior of the hood to the inner space (16) of the hood, flushing means (19b) being provided for directing flushing fluid via the fluid containment space exterior of the hood towards said at least one inlet opening (14b) on the second side (15b) of the hood and at least one outlet opening (20b) being provided on said second side (15b) of the hood on a level above the respective inlet opening (14b) for allowing fluid communication from the inner space (16) of the hood to the fluid containment space exterior of the hood, and that the hood (11) is provided with means (21) for directing fluids through the respective outlet opening (20b) on said second side (15b) of the hood from the inner space (16) of the hood to the fluid containment space exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface of the fluid containment space.
4. A device according to claim 3, **characterized in** that said directing means (21) is arranged to direct fluids through the respective outlet opening (20b) on said second side (15b) of the hood from the inner space (16) of the hood to the fluid containment space exterior of the hood in a direction essentially opposite the flushing direction of the flushing means (19b) arranged on the second side (15b) of the hood.
5. A device according to any of the preceding claims, **characterized in** that the hood (11) is elongated having an inverted V-shape as seen in cross-section.

6. A device according to any of the preceding claims, **characterized in** that the respective outlet opening (20a, 20b) is provided between a side wall (23a, 23b) of the hood and a top part (22) of the hood.
- 5
7. A device according to claim 6, **characterized in** that said directing means is constituted by a lower surface (21) of the top part (22).
- 10
8. A separator comprising a separator vessel (40), **characterized in** that a device (10) according to any of claims 1-7 is provided at the bottom surface of the separator vessel (40).
- 15
9. A method for removing solids from a fluid containment space, wherein flushing fluid is directed by flushing means (19a) towards at least one inlet opening (14a) on a first side (15a) of a hood (11) arranged at a bottom surface (12) of the fluid containment space (13) so as to force fluids and fluidized solids from the fluid containment space exterior of the hood into an inner space (16) of the hood, **characterized in** that a part of the fluids entering the inner space (16) of the hood is withdrawn by drain means (17, 18), and that another part of said fluids is made to flow from the inner space (16) of the hood back to the fluid containment space (13) exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface (12) of the fluid containment space through at least one outlet opening (20a) provided on said first side (15a) of the hood on a level above the respective inlet opening (14a).
- 20
- 25
- 30
10. A method according to claim 9, **characterized in** that fluids are directed through the respective outlet opening (20a) on said first side (15a) of the hood from the inner space (16)

of the hood to the fluid containment space (13) exterior of the hood in a direction essentially opposite the flushing direction of the flushing means (19a) arranged on the first side (15a) of the hood.

5

11. A method according to claim 9 or 10, **characterized in** that flushing fluid is directed by flushing means (19b) towards at least one inlet opening (14b) on a second side (15b) of the hood opposite the first side (15a) thereof so as to force
10 fluids and fluidized solids from the fluid containment space exterior of the hood into the inner space (16) of the hood, and that a part of the fluids entering the inner space (16) of the hood is made to flow from the inner space (16) of the hood back to the fluid containment space (13) exterior of the
15 hood in an essentially horizontal direction or in a direction towards the bottom surface (12) of the fluid containment space through at least one outlet opening (20b) provided on said second side (15b) of the hood on a level above the respective inlet opening (14b).

20

12. A method according to claim 11, **characterized in** that fluids are directed through the respective outlet opening (20b) on said second side (15b) of the hood from the inner space (16) of the hood to the fluid containment space (13) exterior of the hood in a direction essentially opposite the
25 flushing direction of the flushing means (19b) arranged on the second side (15b) of the hood.

25

13. A method according to claim any of claims 9-12, **characterized in** that the flushing means (19a, 19b) during a first
30 mild flushing mode are made to jet flushing fluid at such a rate that the circulation of fluids between the fluid containment space (13) exterior of the hood and the inner space (16)


30

of the hood will essentially only affect the fluids in the lower part of the fluid containment space and leave the fluids in the upper part of the fluid containment space essentially unaffected by the circulation.

5

14. A method according to claim 13, **characterized in** that the flushing means (19a, 19b) during a second heavy flushing mode are made to jet flushing fluid at a higher rate than during the mild flushing mode.


10



ABSTRACT

The invention relates to a device for removing solids from a fluid containment space, said device comprising a hood (11) arranged or intended to be arranged at a bottom surface of the fluid containment space, at least one inlet opening (14a) and at least one outlet opening (20a) being provided on a first side (15a) of the hood. The hood (11) is provided with means (21) for directing fluids through the respective outlet opening (20a) on said first side (15a) of the hood from the inner space (16) of the hood to the fluid containment space exterior of the hood in an essentially horizontal direction or in a direction towards the bottom surface of the fluid containment space. The invention also relates to a separator comprising such a device and a method for removing solids from a fluid containment space.

(Fig. 2)



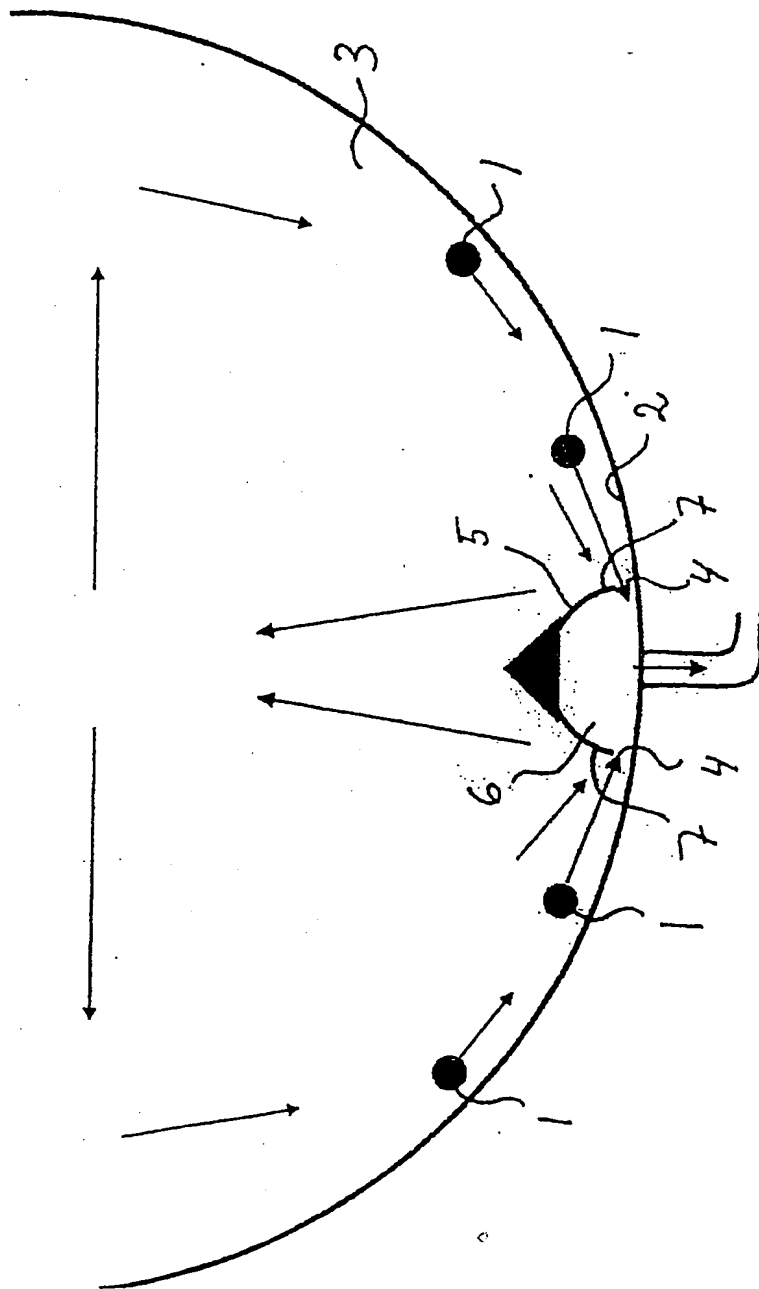


Fig 1


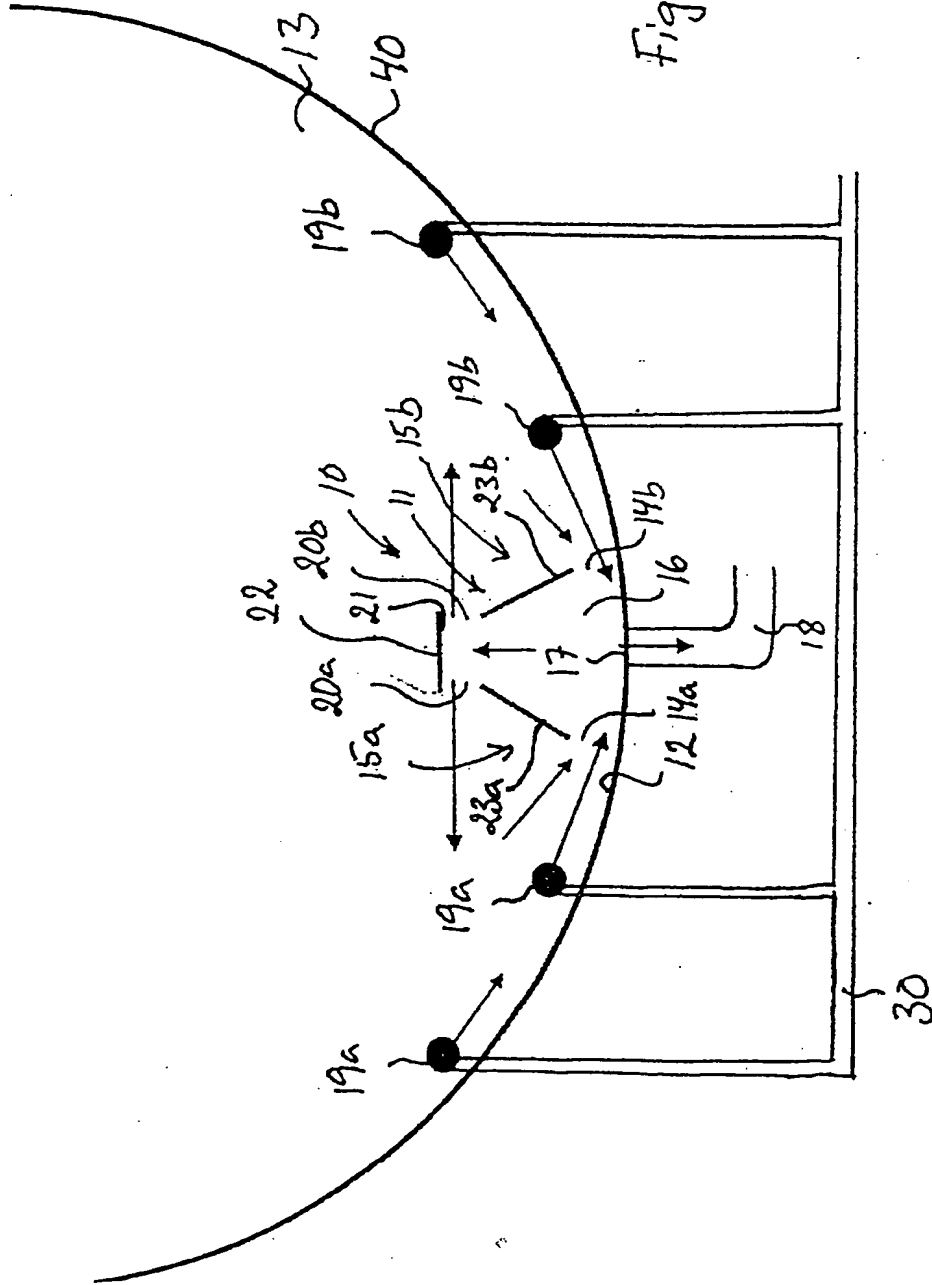


Fig 2



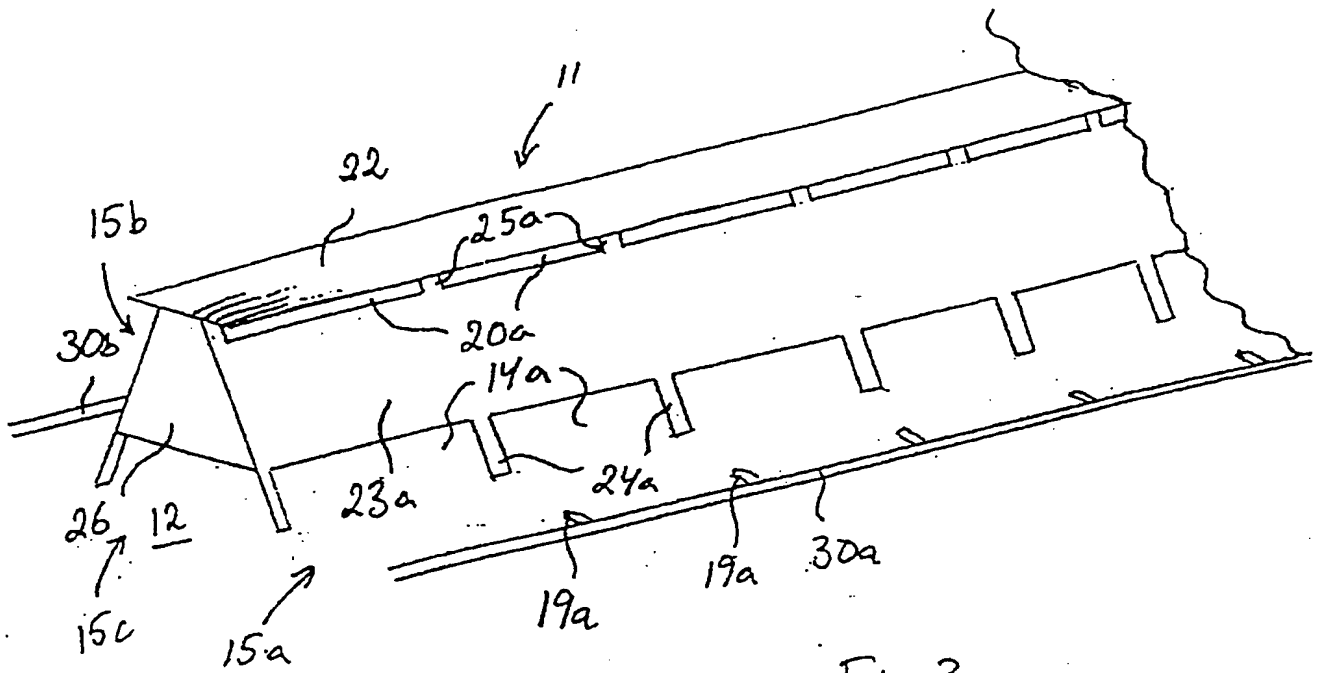


Fig 3

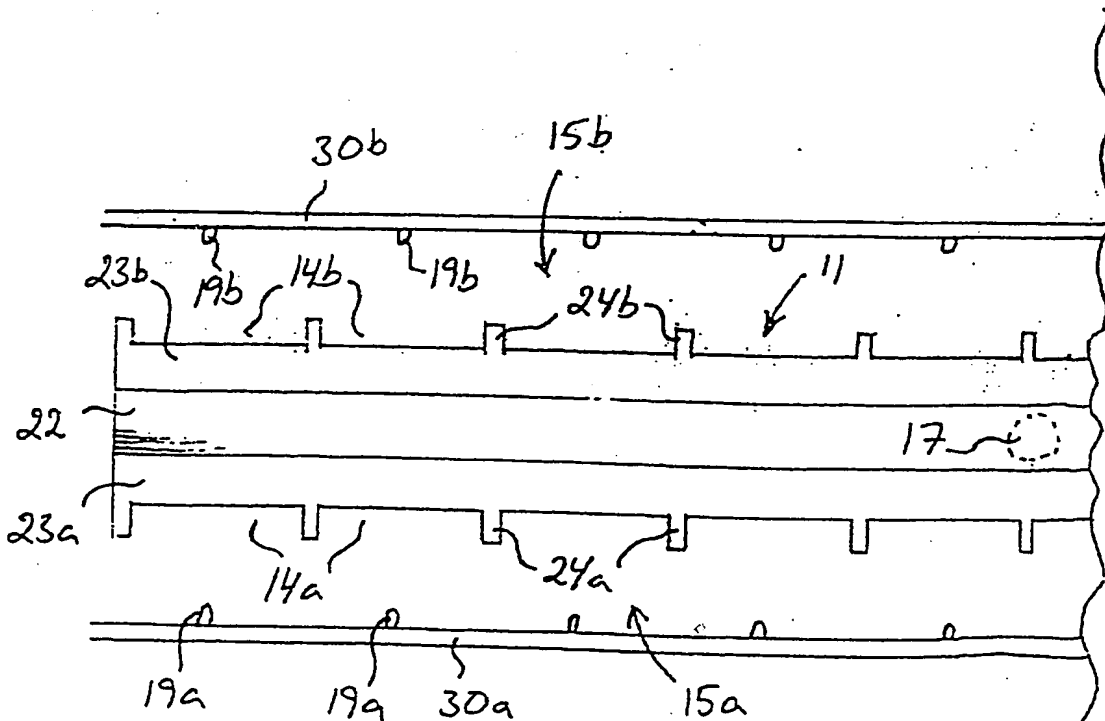


Fig 4

